




Dimension: (Unit: mm)

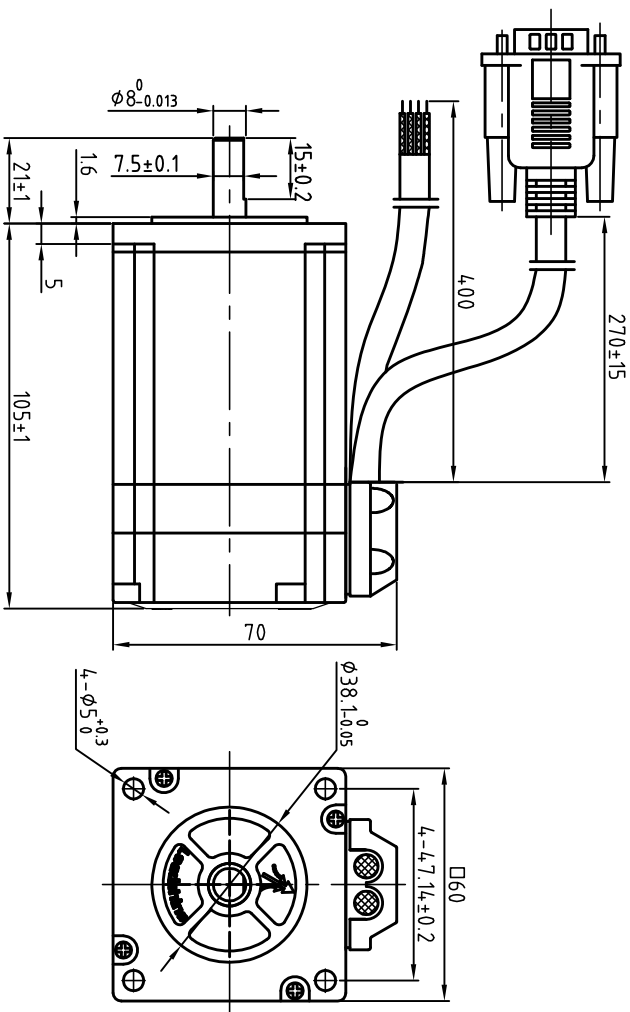

Encoder Signals



PIN	1	2	3	11	12	13
颜色	黑	红	白	黄	绿	蓝
定义	A+	VCC	GND	B+	B-	A-

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(load 4.50g)
Axial play	Max:0.08mm(load 900g)

Specification:

Current/phase	5.0 A
Voltage	2 V
DC Resistance/phase ±10%	0.4 Ω
Inductance/phase ±20%	1.8mH
Holding torque	3.1 N·M
Inertia	0.84 kg·cm ²
Weight	1.6 kg
Encoder resolution	1000 cpr

设计 Designed	王洪焱	日期 Date	17.05.02	材料 Material				深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	刘耀峰	17.05.02		第一角画法 First Angle projection				混合伺服电机
批准 Approved	田天胜	17.05.02		重量/Weight	比例/Scale	修改痕迹/Stage Mark		D57CME31
图号 Part No.				共 1 套/第 1 套	Sheet 1 of 1			图号 DWG. NO.
								LS-CM57-04-0011-02

版本/Rev	日期/Date	变更文件号/ECN NO.	变更内容/Revisions	设计/By
V1.0	17.05.02		初版	王洪焱