

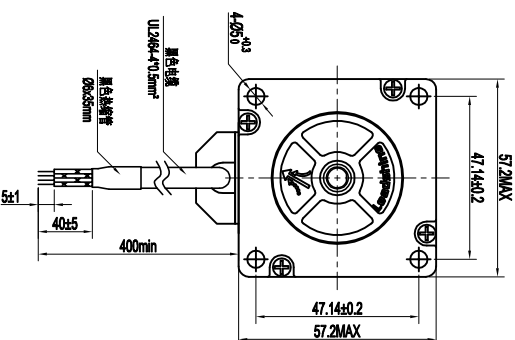
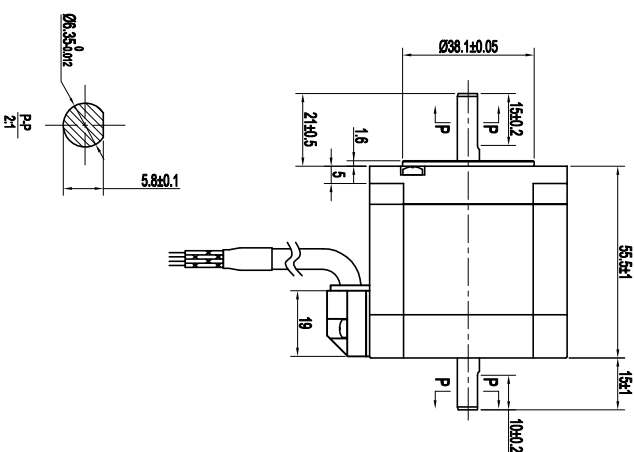


DIMENSIONS Unit:mm

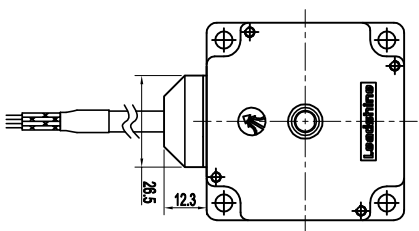

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(load 4.50g)
Axial play	Max:0.08mm(load 900g)

Current/phase	4.0 A
Voltage	168 V
DC Resistance/phase ±10%	0.42 Ω
Inductance/phase ±20%	1.6 mH
Holding torque	1.3 N·M
Detent torque	0.04 N·M
Inertia	0.3 kg·cm <sup>2</sup>
Weight	0.72 kg

设计 Designed	何时强	日期 Date	2021.04.28	材料 Material	第一角画法 First angle projection			深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	黄捷建	2021.04.28		版本/版次 A/01	比例 Scale	阶段标志 Stage Mark	混合式步进电机	
批准 Approved	黄捷建	2021.04.28		共 1 套 第 1 套 Sheet 1 of 1			57CM13-SZ MS30	
零件图号 Part No.	LS-MT-01-07A						图号 DWG. NO.	
							LS-57CM13-SZ MS30	

版本 Rev	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	21.04.28		初版	王洪林