



DIMENSIONS Unit:mm

|         |          |               |                |       |
|---------|----------|---------------|----------------|-------|
| 版本 Rev: | 日期 Date  | 变更文件号 ECN NO. | 变更内容 Revisions | 设计 By |
| V1.0    | 21.04.28 |               | 初版             | 王琳琳   |

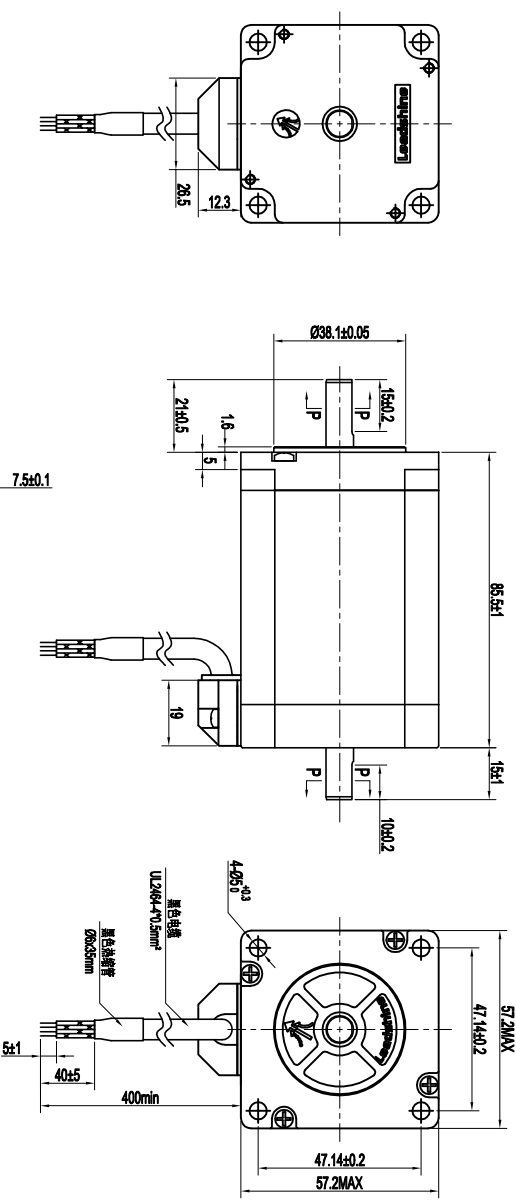

Common Rating

|                       |                        |
|-----------------------|------------------------|
| Step angle            | 1.8°                   |
| Position accuracy     | 1.8±0.09°              |
| Dielectric strength   | 500VAC 1min            |
| Insulation resistance | 100MΩhm(500VDC)        |
| Insulation class      | B                      |
| Temp rise(Max)        | 80K                    |
| Radial play           | Max:0.02mm(load 4.50g) |
| Axial play            | Max:0.08mm(load 900g)  |

|                          |                         |
|--------------------------|-------------------------|
| Current/phase            | 5.0 A                   |
| Voltage                  | 2.2 V                   |
| DC Resistance/phase ±10% | 0.44 Ω                  |
| Inductance/phase ±20%    | 2 mH                    |
| Holding torque           | 2.6 N·M                 |
| Detent torque            | 0.068 N·M               |
| Inertia                  | 0.48 kg·cm <sup>2</sup> |
| Weight                   | 1.2 kg                  |

|                  |              |                                 |  |
|------------------|--------------|---------------------------------|--|
| 设计<br>Designed   | 日期<br>Date   | 材料<br>Material                  | 深圳市雷赛智能控制股份有限公司<br>SHENZHEN LEADSHINE TECHNOLOGY CO., LTD. |
| 审核<br>Checked    | 2021.04.28   | 第一角画法<br>First angle projection | 混合式步进电机  |
| 批准<br>Approved   | 2021.04.28   | 版本/版次<br>Scale                  | 57CM26-SZ MS30   |
| 零件编号<br>Part No. | LS-MT-01-07A | 共 1 套 第 1 套<br>Sheet 1 of 1     | 图号<br>DWG. NO. LS-57CM26-SZ MS30                           |